

# FireblockWall™

## Stops fire. Saves time.



FireblockWall is the first of its kind reusable one hour fire-rated temporary containment system. It installs four times faster than drywall, saving time and money. It meets four industry fire codes, including the critical certification for a one-hour fire barrier—and it exceeds ICRA Class IV and V guidelines. As the only safe and sustainable solution that can be used over and over, FireblockWall delivers unmatched performance and durability.

1  
**HOUR**  
**FIRE-RATED**


Meets ASTM E119,  
ASTM E84, NFPA 241,  
and IBC requirements.

[STARCSystems.com](http://STARCSystems.com) | 844-989-2006

**STAR**  
UNDISRUPT RENOVATION.™

# How It Works

Contractors and their crews love STARC® for its simple, intuitive and fast installation. FireblockWall™ offers that same ease of setup. With lift-and-drop connections and telescoping tracks, you can install fire-rated containment four times faster than drywall.

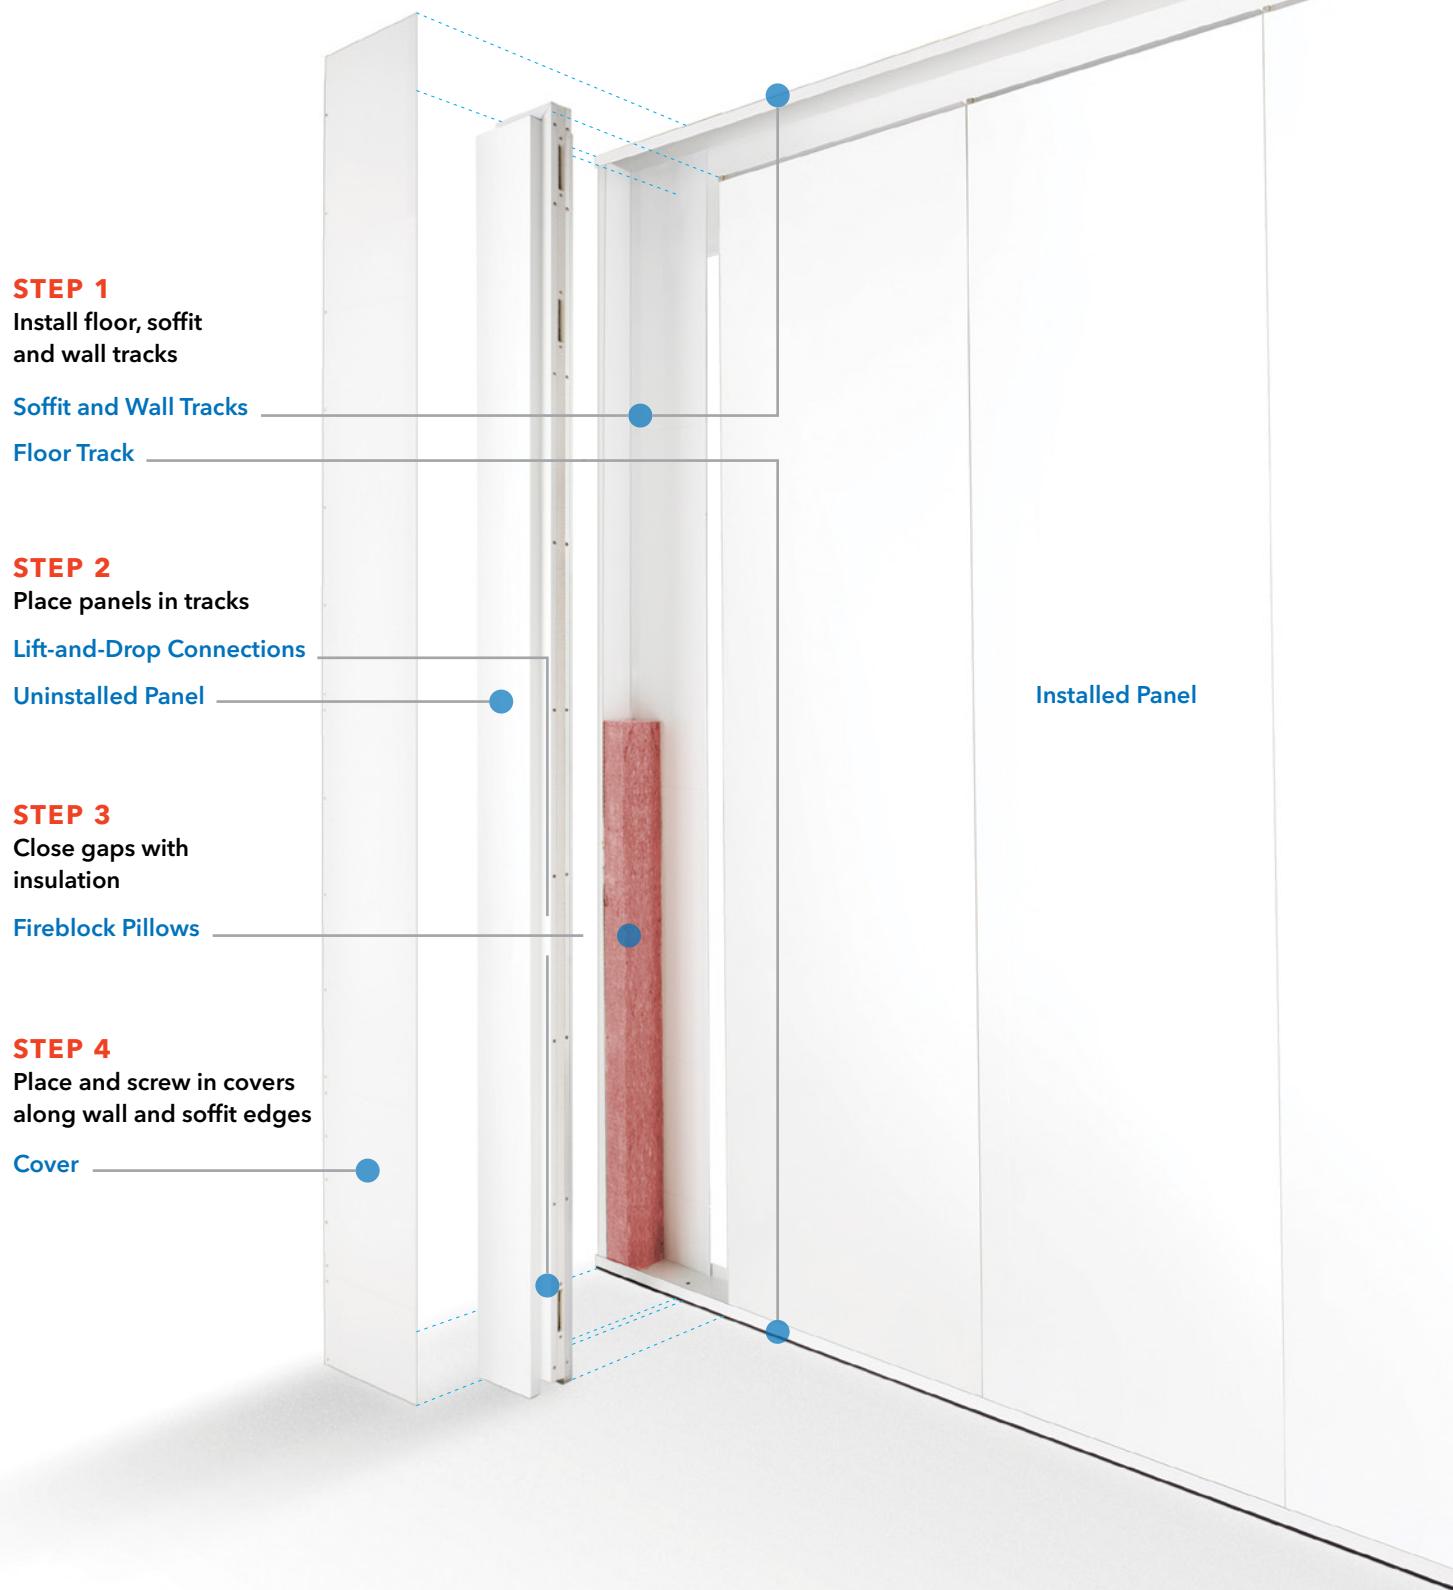

# FireblockWall™ Panels



## One-hour fire-rated

Meets ASTM E119, ASTM E84, NFPA 241, and IBC requirements.



## Lift & Drop Assembly


Tongue and groove panels with T-slot connections allow for quick installation and an airtight seal between panels. No tools required.

## Proprietary Inner Core

Provides a certified one-hour fire rating and superior noise-blocking, with an STC rating of 40.

## Galvanized Steel

Provides extra durability and years of reuse.

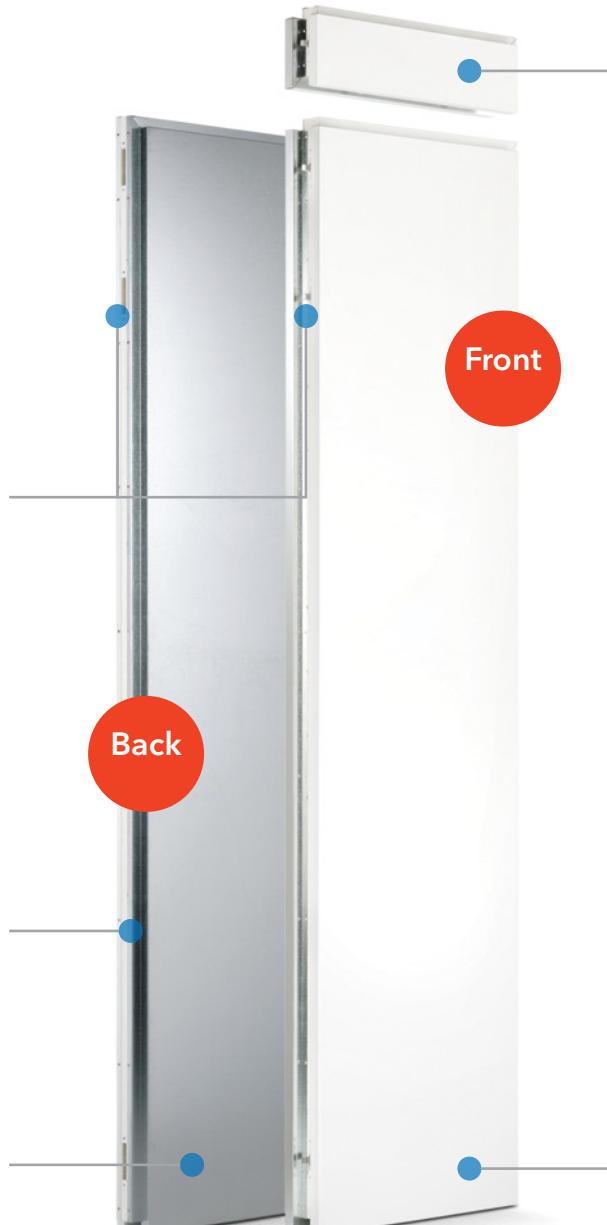


## Extension Panels

When required, 6" or 12" filler panels can be added to larger panels to create additional height.

## Multiple Heights

Two standard heights: 92" or 104", which can accommodate 8' to 10' ceiling heights.



## Multiple Widths

Three standard widths: 6", 12" and 24".



## Exceeds ICRA Class IV and V

Panel design and gaskets create airtight seals that contain dangerous dust, debris and pathogens. Meets NFPA 241 standards and pre-approved by HCAI.

## Powder Coated Surface

Attractive finish blends into existing environment. Surface is easy to clean and readily accepts vinyl graphics.

# Doors & Negative Air, Air Monitoring Panels

## Fire-Rated Door

Commercial steel door is certified for fire safety and provides clearance area 80" high and 39" wide. Door opens either left or right.

## Fire-Rated Closer

One-hour fire-rated Yale hinged closer.



## Fire-Rated Handles

Three options to fit your needs: Yale Lever handle, Schlage electronic keypad or Kaba mechanical push button entry lockset all available with interchangeable cores.

