

**LiteBarrier™**

**Lighter weight. Extra durable.**



**The premier solution in  
lightweight temporary containment.**

STARC's LiteBarrier is the most durable, best  
looking, and easiest-to-install lightweight containment  
solution available.



**LIGHTWEIGHT**

[STARCsysteams.com](http://STARCsysteams.com) | 844-596-1784

**STAR**®


UNDISRUPT RENOVATION.™

# LiteBarrier™ Lightweight & Durable Panels




## Ceiling Grid Attachment Options

Fits standard, recessed and concealed grid tiles




## 360° T-Slot Attachment System

Unlimited attachment options for brackets, anchors, and braces



## Dual Slots & Flanged Stud

Simple toolless, knobless lift and drop connection

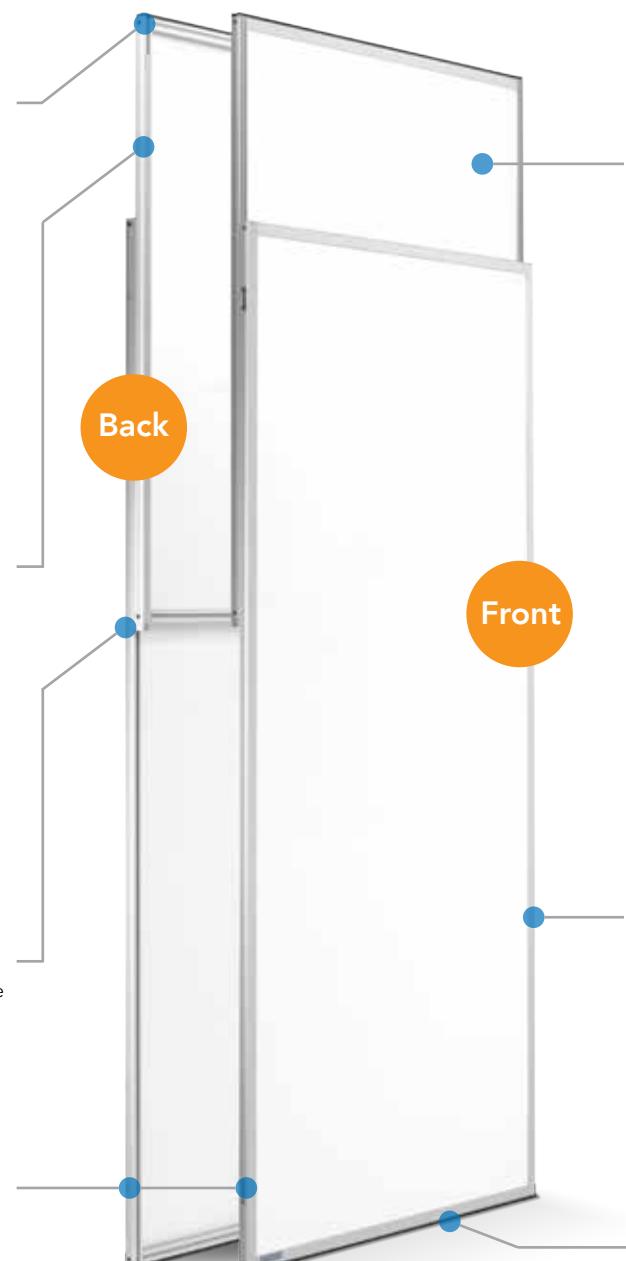

**Adjustable Height**  
Telescoping panels extend from 6'10" to 13'

 **Lightweight**  
Weight ranges from 18 to 40lbs

 **Superior Durability**  
Fiberglass reinforced polymer panel

**Anodized Aluminum Frame**  
Extremely rugged and durable



**Top & Bottom Gaskets**  
Provides airtight seals between the panel, ceiling, and floor

# LiteBarrier™ Fully Integrated Negative Air Panels

## One Width

Available in a 24" width



## Integrated Pressure Ports


Negative air port built into panel



## Standard Duct Collar

12" Duct collar with an adjustable shutter

## Back

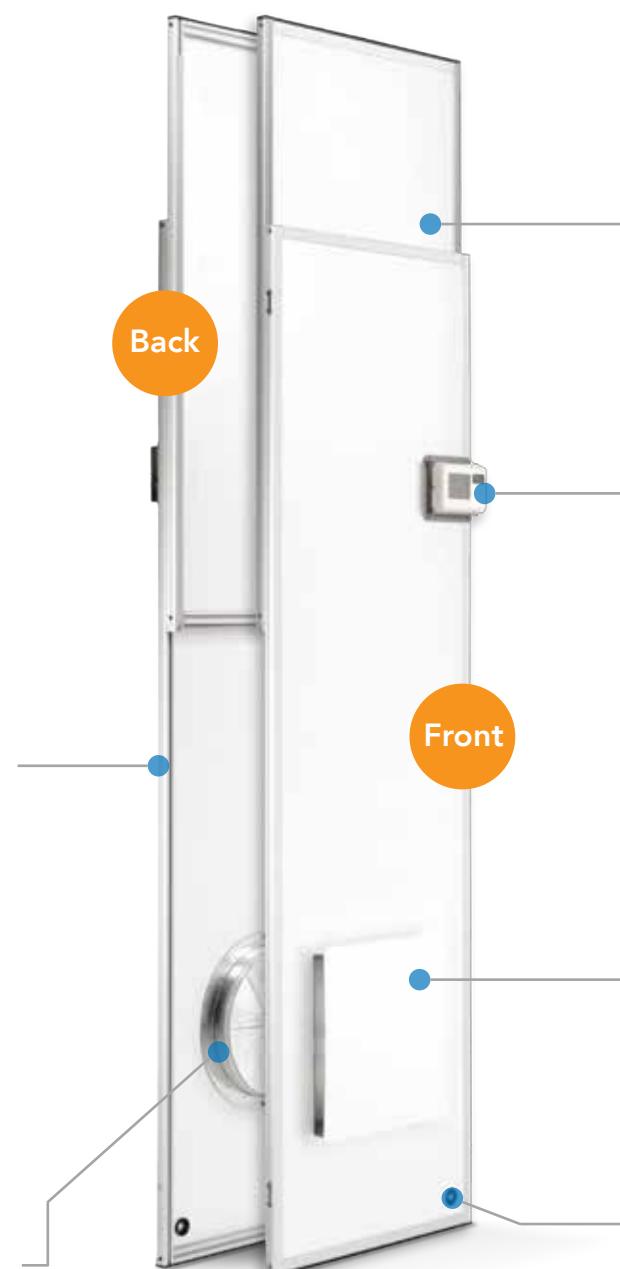

## Adjustable Height

Telescoping panels extend from 6'10" to 13'



## Optional Pressure Monitor

Supports differential pressure monitor and common data recorders



## Power Cord Passage

Makes it easy to integrate a power source

# LiteBarrier™ Versatile Hinged Doors



## Lock Options

Multiple lock options for varying levels of security



## Adjustable Threshold & Sweep

Allows for the installation of doors on uneven surfaces



## Modular "Over the Door" Kit

Airtight flexible panels that seal from the top of the door to the ceiling



## Superior Hinge System

Allows for quick in/out and left/right adjustability



Multiple widths that offer unlimited configuration options.

LB-HD-42 / 54

LB-SD-42 / 54